

# New Waveform Surveillance and Diagnostics for the LEP Injection Kickers

E. Carlier, V. Mertens and H. Verhagen  
European Organization for Nuclear Research (CERN) - SL Division,  
CH - 1211 Geneva 23, Switzerland

## Abstract

The introduction of the Bunch Train Scheme in LEP requires a more precise and automatic supervision of the stability of the LEP injection kickers in timing and amplitude. Comprehensive and user-friendly diagnostic tools are required for in-depth investigation of equipment behaviour. A new system is currently being prepared using to a large extent commercial data acquisition hardware and hardware-independent software products.

## 1. EQUIPMENT

The LEP injection kickers [1] are fast pulsed magnets used to inject electron and positron bunches, arriving from pre-accelerators into the desired beam orbit in LEP. Three kicker magnets equally spaced along LEP, produce a fast orbit deformation of the stored bunches as shown in figure 1. At the moment when the kicker magnet deflects an already circulating bunch close to the field-free side of the septum, a newly injected bunch arrives at its field side and is bent by the septum magnet nearly parallel to the trajectory of the stored bunches. The duration of the fast orbit deformation must be sufficiently short to deflect only the stored bunch to which the new particles are to be added and must be exactly timed to avoid injection losses and residual beam oscillation.

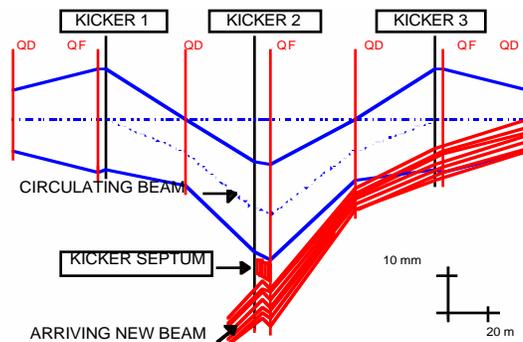


Fig 1. Layout of the fast orbit deflection for LEP injection, (QF, QD: focusing and defocusing quadrupole magnets).

The efficiency of the LEP injection kickers depends on two major parameters: the stability and reproducibility of the kick amplitude (better than 1 %) and the stability and precision of the kicker timing with respect to the injected and circulating beam (better than 25 ns). A typical kicker pulse, together with a signal of the injected beam current, is shown in figure 2.

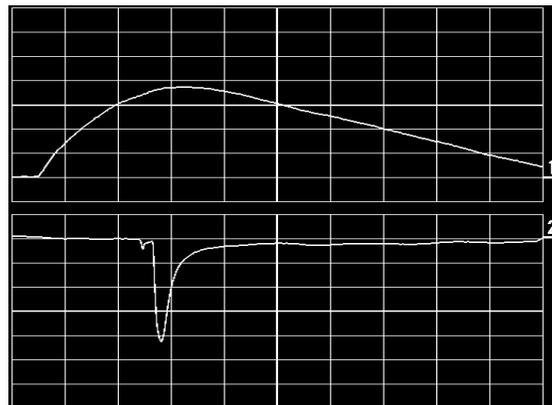


Fig 2. Typical kicker pulse (1) (300 A/div.) and injected beam current (2) (1  $\mu$ s/div.).

## 2. SCOPE OF THE PROJECT

So far no permanent surveillance of the LEP injection kicker signals exists. The kick/beam timing synchronisation and the stability of the kick amplitude can only be controlled manually and only for following pulses, since no storage of previous pulses is foreseen. Faulty behaviour of the equipment can therefore only be confirmed if the symptoms persist. Monitoring of the evolution of the parameters in time to keep optimum performance is manpower-intensive.

Considerable improvements were nevertheless mandatory with the advent of the so-called 'bunch train scheme' [2] at LEP in 1995. In this scheme a much greater number of bunches circulate in the machine and a more precise injection scheme is needed. It has now become more important than before to precisely supervise and maintain the performance of the injection kickers and to trace back reasons of faults rapidly and with certainty.

It has therefore been decided to provide better surveillance and diagnostic facilities in the framework of an improvement project. These facilities comprise tools to select, acquire, log, retrieve and visualise signals from the beam pickup and the kicker system, to analyse them and to compare them with reference pulses. These tools should be either callable on request for diagnostic and adjustment, or run continuously in the background for equipment surveillance, with the possibility of informing the equipment specialists of any malfunctions. Finally, they could be used to readjust the timing and pulse heights automatically, if so desired.

### 3. GENERAL LAYOUT

In order to use commercial data acquisition hardware, to avoid as much as possible hardware dependence and to keep a high level of modularity, the application is being developed in the framework of LabVIEW [3].

The software part of the application is organized in a client/server scheme and divided into three layers: the data acquisition, the data analysis and the data presentation. The two first layers constituting the server part are running on a front-end computer located close to the acquisition hardware in order to reduce the data exchange over the network and profit from the event-driven capabilities of LabVIEW. The third layer, the client part of the application, is the graphical user interface which runs on HP workstations.

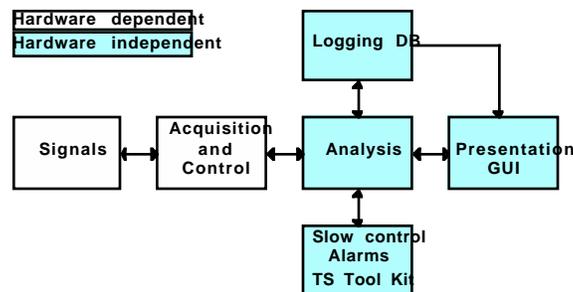


Fig 3. Software structure.

The acquisition layer includes the measurement devices and their integration. The hardware independence is achieved by using the LabVIEW virtual instruments driver library. The analysis layer comprises the tools used for signal surveillance and diagnostics. It also includes utilities through which the system interacts with other systems such as the general CERN alarm system, the equipment slow control, or databases. The presentation layer offers an uniform graphical user interface and look-and-feel for the application and can be run simultaneously from many computers without disturbing the acquisition and analysis processes.

The low level layers are seen by the top layer as virtual instruments. The communication between both levels is performed through the LabVIEW virtual instruments network based on BSD IPC using Internet stream socket [4].

### 4. ACQUISITION and DISPLAY

The kicker magnet, beam current and trigger signals are remotely selectable through multiplexer units and acquired through signal digitizers.

The single shot sampling rate is 500 MS/s for four channels with a resolution of 8 bits. The higher acquisition repetition rate is equal to 1.2s for a signal duration smaller than 2 ms.

The acquisition hardware will be connected to the existing accelerator control system (represented by a TCP/IP based Ethernet network) [5] either through a GPIB bus connected to a PC, plug-in DAQ boards integrated within a PC, or a VXI crate with a VXIpc card at the slot 0 position. In any case, DOS/MS Windows and LabVIEW will be used in the front end computer level.

The main advantage of the VXI solution is the existence of the VXI "plug&play" standard initiative which simplifies the setting up of VXI based systems. The same may hold true in the PC plug-in DAQ board solution when using the Windows 95 operating system. The GPIB solution offers the largest selection of instrumentation devices. All three ways of integrating the acquisition instruments are supported by LabVIEW.

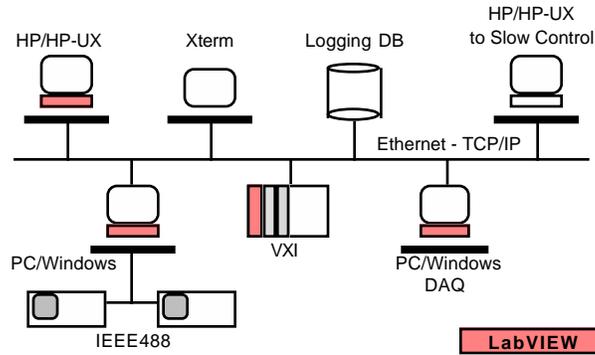


Fig 4. Overview of the high and low level acquisition system.

The waveforms are displayed graphically, on demand, on HP 9000/7xx series workstations, X terminals and PCs with X emulators, using the X Windows system.

A remote on-line Oracle database is used to store the default acquisition settings, the acquired and the reference waveforms. The connection to the kicker slow control is achieved through a fully configurable, event and data driven software package running on a HP workstation [6].

## 5. ANALYSIS

The selected waveforms (kickers + beam signals) are acquired upon reception of trigger prepulses when the system is pulsing and beam is available. The latest acquisitions are logged and kept in a local database organised as a FIFO. Upon request, the waveforms can be transferred and stored, together with the present timing and voltage settings, onto a remote Oracle database as reference waveforms.

Each newly acquired waveform is automatically compared with the corresponding reference. In order to detect differences in amplitude or in time, smart trigger facilities (envelope, level or window trigger) are used. If the new waveform is outside predetermined limits an internal trigger is generated and the last-measured waveforms are automatically stored with the reason for the fault in a remote Oracle database for later analysis.

Tools to select, extract, replay and display the acquisitions either from the local database or from the remote Oracle database are foreseen.

Upon detection of an internal trigger, a call to an external C function with predetermined parameters is made. This call connects the analysis layer to the existing equipment slow control software from where further actions can be initiated. Beside this interlock facility, different levels of alarms (warning, fault,..), depending on the severity of the deviation are provided. These alarms are sent to the general CERN alarm system through a call to the equipment slow control software [7].

For each new acquisition the difference in amplitude between the measured and reference signals is automatically checked at a predetermined number of points. The difference between the signals for the corresponding points is calculated and sent to the equipment slow control software for pulse to pulse regulation.

## 6. CONCLUSION

The project is actually in its design phase. Different technical solutions and configurations have been evaluated and it appears that the use of commercial hardware and software products for this kind of application tends to maximize flexibility, minimize obsolescence and reduce development time, effort and maintenance.

The use of well established, proven and long-lasting hardware and software leads to a minimum of specific development, even if the needs or the environment evolve, and this can reduce the cost over the lifetime of the system.

Due to manpower limitations, the realisation of this project will be outsourced to industry.

## ACKNOWLEDGEMENTS

The authors would like to thank all persons who have increased their trust in the successful integration of commercial hardware and software products into the existing accelerator control system and those who have contributed with comments, suggestions, and information to the evolution of this project.

## REFERENCES

- [1] G.H. Schröder, J. Bonthond, U. Jansson, H. Kuhn, M. Mayer and G. Vossenber, The Injection Kicker Systems of LEP, Proc. European Particle Accelerator Conference, Rome, Italy, June 7 - 11, 1988, Vol. 2, p. 1381, ISBN 9971-50-642-4, and CERN SPS/88-26 (ABT).

- [2] B. Balhan, A. Burton, E. Carlier, J.-P. Deluen, J. H. Dieperink, N. Garrel, B. Goddard, R. Guinand, W. Kalbreier, M. Laffin, M. Lamont, V. Mertens, J. Poole and H. Verhagen, Modification of the LEP Electrostatic Separators Systems for Operation with Bunch Trains, Proc. 1995 Particle Accelerator Conference and International Conference on High-Energy Accelerators, Dallas, USA, May 1 - 5, 1995, CERN SL/95-45 (BT).
- [3] National Instruments Corporation, Instrumentation Reference and Catalogue, 6504 Bridge Point Parkway, Austin, TX 78730-5039 USA, and World-Wide Web URL <http://www.natinst.com/>.
- [4] National Instruments Corporation, LabVIEW Networking Reference Manual, part number 320587-01, 6504 Bridge Point Parkway, Austin, TX 78730-5039 USA.
- [5] P. Anderssen, P. Charrue, R. Lauckner, P. Liénard, R. Rausch, M. Tyrrell and M. Vanden Eynden, Interfacing Industrial Equipment to CERN's Accelerators and Services Control System, CERN SL/95-42 (CO).
- [6] V. Mertens, A. Aimar and E. Carlier, A Simple Generic Software Tool Kit for Distributed Controls Applications, Proc. International Conference on Accelerators and Large Experimental Physics Control Systems, Berlin, Germany, October 18 - 22, 1993, Nucl. Inst. Meth. A352(1994)427, CERN SL/93-49 (BT), and World-Wide Web URL [http://dxbt00.cern.ch/ts/ts\\_papers/berlin93.html](http://dxbt00.cern.ch/ts/ts_papers/berlin93.html).
- [7] A. Aimar, E. Carlier, C. Cameron, A. Ferrari, B. Goddard, M. Laffin, V. Mertens and M. Tyrrell, Centralised Equipment Surveillance Using a Configurable Software Tool Kit as Front-End to the CERN Alarm System, CERN SL/Note 95-34 (BT).